

# cubistar



**Cubistar wall-mounted condensing units offer maximum flexibility, and are suited to a wide range of chilling and freezing applications.**

Units are available in a 1, 2 or 3 fan configuration with a robust fully-welded and corrosion resistant housing. The range includes models fitted with hermetic or semi-hermetic compressors, high efficiency integrated vertical discharge condensers, and required refrigeration components. Each unit is also fitted with an electrical panel including compressor, condenser and evaporator management with mechanical or electronic control as per requirements.


Cubistar units are fully factory tested and supplied with our unique, easy-mount wall bracket to facilitate quick on-site installation.



Cubicool International is committed to ensuring its products are designed, manufactured and assembled to operate in the most energy-efficient manner possible, using the latest available technologies and design methodologies in keeping with best industry practice

**cubicool**  
i n t e r n a t i o n a l

## Product Specifications

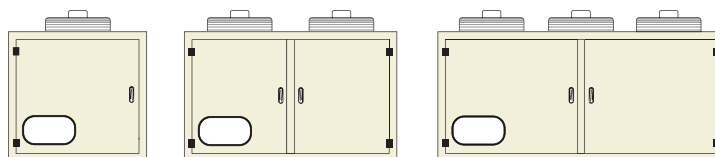

		TYPE A	TYPE B	TYPE C
Dimensions				
Length	(mm)	750	1150	1550
Width	(mm)	480	480	480
Height	(mm)	830	830	830

## Unit Specifications

Model Number	Unit			Compressor			Condenser		Connections	
	Type	Maximum Current *		Model	Power	Oil Type	Coil Air Flow	Fan size	Suction	Liquid
		220V/1- (A)	380V/3- (A)							
CSM-9480Z-A1	A	7.50	-	CAJ9480Z	0.46/6.3	P.O.E	2916	1 x 350	1/2	1/4
CSM-9513Z-A1	A	11.00	-	CAJ9523Z	0.83/1.25	P.O.E	2916	1 x 350	5/8	1/4
CSM-4519Z-A1	A	16.30	-	CAJ4519Z	1.10/1.50	P.O.E	2844	1 x 350	5/8	3/8
CSM-4519Z-A3		-	5.70	TAJ4519Z						
CSM-4524Z-A1	A	19.00	-	FH4524Z	1.47/2.00	P.O.E	2772	1 x 350	5/8	3/8
CSM-4524Z-A3		-	7.20	TFH4524Z						
CSM-4531Z-A1	A	25.30	-	FH4531Z	1.84/2.50	P.O.E	2700	1 x 350	7/8	3/8
CSM-4531Z-A3		-	9.10	TFH4531Z						
CSM-4540Z-B3	B	-	11.00	THF4540Z	2.21/3.00	P.O.E	5688	2 x 350	7/8	3/8
CSM-4546Z-B3	B	-	13.20	TAG4546Z	2.94/4.00	P.O.E	5544	2 x 350	7/8	3/8
CSM-4553Z-B3	B	-	13.80	TAG4553Z	3.31/4.50	P.O.E	5544	2 x 350	7/8	3/8
CSM-4561Z-B3	B	-	15.80	TAG4561Z	3.68/5.00	P.O.E	5400	2 x 350	1 1/8	3/8
CSM-4568Z-C3	C	-	17.90	TAG4568Z	4.42/6.00	P.O.E	8532	3 x 350	1 1/8	1/2
CSM-4573Z-C3	C	-	20.70	TAG4573Z	4.60/6.25	P.O.E	8100	3 x 350	1 1/8	1/2
CSM-4581Z-C3	C	-	23.20	TAG4581Z	5.15/7.00	P.O.E	8100	3 x 350	1 1/8	1/2
Low Temp.										
CSL-2464Z-A1	A	10.60	-	CAJ2464Z	1.10/1.50	P.O.E	2844	1 x 350	5/8	1/4
CSL-2480Z-A1	A	16.90	-	FH2480Z	1.47/2.00	P.O.E	2772	1 x 350	5/8	3/8
CSL-2480Z-A3		-	7.70	TFH2480Z						
CSL-2511Z-A1	A	24.90	-	FH2511Z	1.84/2.50	P.O.E	2700	1 x 350	5/8	3/8
CSL-2511Z-A3		-	8.50	TFH2511Z						
CSL-2513Z-B3	B	-	10.20	TAG2513Z	2.21/3.00	P.O.E	5688	2 x 350	7/8	3/8
CSL-2516Z-B3	B	-	11.60	TAG2516Z	2.94/4.00	P.O.E	5688	2 x 350	7/8	3/8
CSL-2522Z-B3	B	-	15.80	TAG2522Z	3.68/5.00	P.O.E	5544	2 x 350	1 1/8	3/8
CSL-2525Z-C3	C	-	17.30	TAG2525Z	4.42/6.00	P.O.E	8100	3 x 350	1 1/8	1/2

\* For compressor only as per Tecumseh specifications