



Cubimax is a simple, ready to use, plug-in solution, for simplicity on site.




Roof entry versions also available

Cubimax plug-in units offer simplified installations and are suited to a wide range of chilling and freezing applications specifically designed for African conditions.


Units are available in a 1,2 or 3 evaporator or condenser fan configuration with a robust, fully-welded and corrosion resistant housing. The range includes models fitted with hermetic or semi-hermetic compressor and high efficiency integrated vertical discharge condenser. The complete refrigeration system is pre-charged, completely factory tested and ready to use.

'Slide through an aperture, connect the power supply and switch on'.

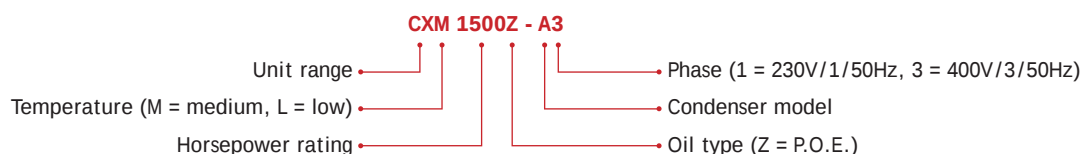



Product Specifications

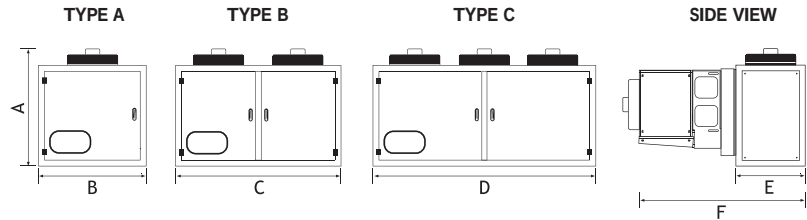

Dimensions		TYPE A	TYPE B	TYPE C	SIDE VIEW
Length	[mm]	750	1150	1150	1300 (F)
Width	[mm]	480	480	480	480 (E)
Height	[mm]	830	830	830	830

Plug thickness: 100mm

Unit Specifications

MODELS		MAXIMUM CURRENT [A]		COMPRESSOR	MAX ROOM	CAPACITY [kW]		CUT OUT SIZE	EVAP FAN
MEDIUM TEMPERATURE	TYPE	230V/1/50Hz	400V/3/50Hz	[hP]	VOLUME [m³]	at -5/45°C	at -25/45°C	L x H [mm]	[mm]
CXM 0625Z - A1	A	7.1	-	0.625	8	1.5	-	710 x 610	1 x 300
CXM 1250Z - A1	A	12.6	-	1.25	14	2.3	-	710 x 610	1 x 300
CXM 1500Z - A1	A	10.6	-	1.5	31	3.2	-	710 x 610	1 x 300
CXM 2000Z - A1	A	14.6	-	2	42	4.1	-	710 x 610	1 x 350
CXM 2500Z - B1	B	15.8	-	2.5	60	5.4	-	1110 x 610	2 x 350
CXM 1500Z - A3	A	-	5.6	1.5	31	3.2	-	710 x 610	1 x 300
CXM 2000Z - A3	A	-	7.3	2	42	4.2	-	710 x 610	1 x 350
CXM 2500Z - B3	B	-	9.7	2.5	60	5.3	-	1110 x 610	2 x 350
CXM 3000Z - B3	B	-	9.3	3	85	6.3	-	1110 x 610	2 x 350
CXM 4000Z - B3	B	-	10.3	4	110	7.1	-	1110 x 610	2 x 350
CXM 4500Z - B3	B	-	12.3	4.5	130	8.6	-	1110 x 610	2 x 350
CXM 6000Z - C3	C	-	16.7	6	150	11.4	-	1510 x 610	3 x 350
CXM 6250Z - C3	C	-	17.1	6.25	170	12.1	-	1510 x 610	3 x 350
CXM 7000Z - C3	C	-	17.6	7	190	13.4	-	1510 x 610	3 x 350
LOW TEMPERATURE									
CXL 1500Z - A1	A	11.6	-	1.5	10	-	1.3	710 x 610	1 x 300
CXL 2000Z - A1	A	18.3	-	2	14	-	2.1	710 x 610	1 x 350
CXL 2500Z - A1	A	36.9	-	2.5	22	-	2.9	710 x 610	1 x 350
CXL 2000Z - A3	A	-	8.1	2	14	-	2.2	710 x 610	1 x 350
CXL 2500Z - A3	A	-	11.1	2.5	22	-	2.6	710 x 610	1 x 350
CXL 3000Z - B3	B	-	12.2	3	30	-	3.2	1110 x 610	2 x 350
CXL 4000Z - B3	B	-	13.8	4	40	-	4.1	1110 x 610	2 x 350
CXL 5000Z - B3	B	-	12.1	5	48	-	4.8	1110 x 610	2 x 350
CXL 6000Z - C3	C	-	14	6	57	-	5.9	1510 x 610	3 x 350

All capacities as per compressor supplier specifications on R404A and oil type P.O.E. Compressor brand will be based on stock availability at time of order

All products in this brochure are produced and manufactured by Cubicool International (Pty) Ltd. Cubicool International (Pty) Ltd cannot accept responsibility for possible errors in this brochure. Cubicool International (Pty) Ltd reserves the right to alter its products without notice. All trademarks in this brochure are property of their respective companies.